

Model 2800-2805

# Ceiling lift

Efficient and fast



- The fastest ceiling lift
- Suitable for intensive use
- Smooth lateral movement
- To be used with slings and/or the Handi-Move® Body Support
- To be used with classic spreader bar or electric tilting spreader bar
- Customized rail systems make it possible to access all areas
- Infrared wireless remote control available
- Back-up control on ceiling lift
- Emergency down and stop within reach

Lift & Care systems for people with reduced mobility

[www.handimove.com](http://www.handimove.com)

# Ceiling lift

## ● Technical specifications

Safe working load .....	200 kg (3000 mm motorband: 160 kg)
Batteries .....	2 x 12 V 8 Ah / rechargeable
Standard motor band length .....	2000 mm (option: 3000 mm)
Rail System .....	aluminium, lacquered in white
Smooth stop and go .....	electronic
Cover .....	ABS
Emergency down .....	mechanical
Handcontrol 2800 .....	watertight IP67 electric
Handcontrol 2805 .....	infra-red
Number of lifts with fully charged batteries .....	160
Load and battery indications .....	visual and auditive
Charger .....	input 0.9 A 100-240 Vac, 50-60 Hz Class II
.....	output 24 Vdc Max 1.3 A (9940) Max 1.2 A (2541)

## ● Speeds


### Speed raising

Load 5 kg .....	2.36 inch / 6.00 cm/sec
Load 100 kg .....	2.28 inch / 5.80 cm/sec
Load 200 kg .....	1.81 inch / 4.60 cm/sec

### Speed lowering

Load 5 kg .....	2.36 inch / 6.00 cm/sec
Load 100 kg .....	2.44 inch / 6.20 cm/sec
Load 200 kg .....	2.59 inch / 6.60 cm/sec

## ● Examples of routes

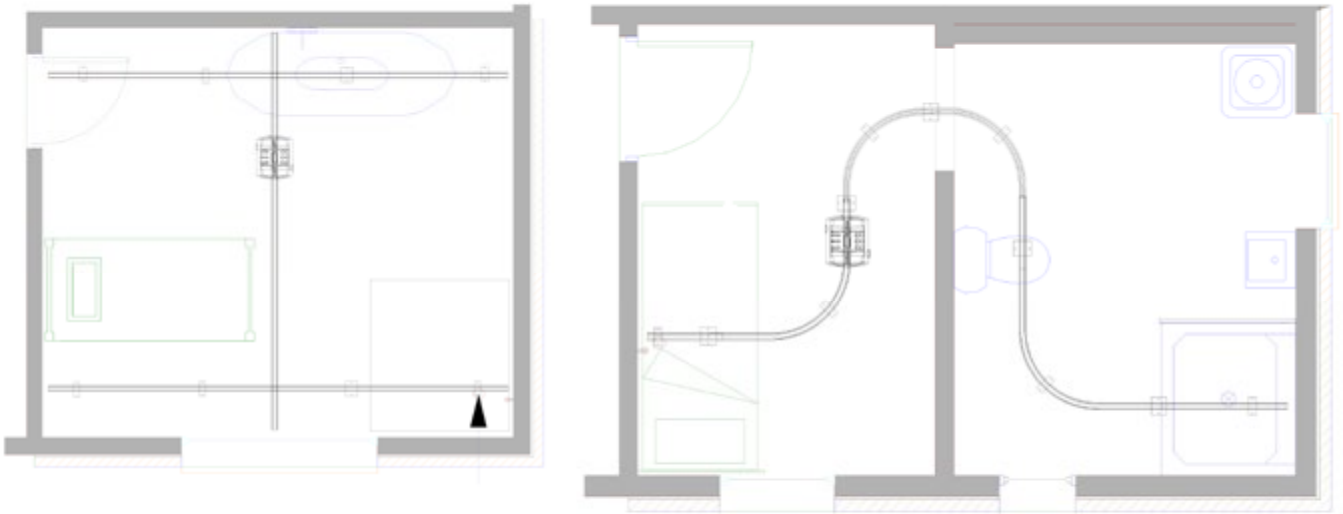

## ● Versions\*

### 2800

Lifting motor (up/down)  
With electric handcontrol

### 2805 IR

Lifting motor (up/down)  
With infra-red remote control

\* also available with lateral motor (2810 L - 2815 L IR)

For free demonstration or further information